

ECI PROPOSAL

St John of God Midland Private Hospital

BLDG4010 — Integrated Construction Project

Group 11 | Jay · Josh · Joe · Armin · Hemen · Sharoon



VERTEX CONSTRUCTIONS



Company Profile

Vertex Constructions is an Australian-owned construction company.

1980s

Established in Victoria

1,000–1,500

Total Workforce

1,000+

Projects Completed

46+

Years of Experience

\$50M–\$2B

Project Capability

6 States

VIC · NSW · WA · QLD · TAS · SA

Experience across:

Healthcare

Education

Commercial

Residential

Our Values

01

Accountable

02

One Goal

03

Safety First

04

**Constructing
Possibilities**

05

Client Satisfaction

Previous Experience in the Health Industry

\$3.6B

Worth of healthcare projects
completed

3,000+

Beds delivered

60+

Health projects delivered

Large portfolio of experience across Australia. *Completed Private and Public Health Developments.*

Previous Project Experience

Fiona Stanley Hospital

CLIENT The Minister for Works / Department of Health, WA

VALUE \$1.6 Billion

DURATION 2009 – 2013

OUTCOME

Complex project delivered ahead of the scheduled program despite on-site complexities and constraints limiting overlapping trades.



Previous Project Experience

St John of God Midland Public and Private

CLIENT

The Minister for Works / Department of Health, WA

VALUE

\$360 Million

DURATION

2012 – 2015

OUTCOME

Delivering a complex project under budget while maintaining high quality of work, with minimal rework through effective value management.



Previous Project Experience

Footscray Hospital

CLIENT Victorian Health and Human Services

VALUE \$1.5 Billion

DURATION 2012 – 2017

OUTCOME

Delivered one of the largest hospitals in Australia ahead of project schedule and under expected client budget through value engineering and cost management.



02

SECTION TWO

Sector & Strategic Analysis

Presented by Sharoon

Current Sector Overview

Healthcare construction in Western Australia

01

Industry Analysis

02

Market Trends

03

Opportunities

04

Challenges

Client Market Structure

SJOG Care – operating reach across local, regional, national and international tiers.

01

LOCAL

Perth metropolitan area operations, community health services and acute care facilities across the greater Perth region.

02

REGIONAL

Presence across key WA regional centres including Bunbury, Geraldton, Kalgoorlie and Albany, supporting rural health infrastructure.

03

NATIONAL

SJOG operates as a national Catholic health and aged-care organisation with facilities and services across multiple Australian states.

04

INTERNATIONAL

Global mission alignment with international Catholic health institutions, informing clinical standards and governance frameworks.

Strategic Fit

Vertex Constructions × SJOG Care

01

Healthcare Experience

02

**Early Contractor Involvement
(ECI)**

03

Stakeholder Coordination

04

Values Alignment

05

Sustainability & Compliance

Strategic Benefits of Collaboration

SJOG Care × Vertex Constructions

Risk Reduction

Cost Certainty

Minimal Disruption

**Improved Design
Coordination**

Innovation Opportunities

Mission Alignment

Why Choose Us?

1

Tier 1 healthcare construction expertise with \$4.6B+ in hospital delivery

2

Proven ECI capability from schematic design through to practical completion

3

Financial strength to support uninterrupted delivery in a volatile WA market

4

Values alignment with SJOG's mission-driven, community-focused culture

5

Integrated team ready for immediate mobilisation

Our Strength & Promises

Delivery Certainty

Programme reliability backed by proven hospital delivery.

Financial Resilience

Capital strength and bonding headroom for uninterrupted delivery.

Collaborative Partnership

Open-book ECI working alongside SJOG and consultants.

Healthcare Expertise

Deep WA hospital construction experience across the team.

Financial Capability

Vertex Constructions — financial position

\$450M

Total Equity

\$316M

Working Capital

\$185M

Cash Reserves

1.79x

Current Ratio

28.6%

Gearing

6.9x

Interest Coverage

Benchmark All ratios meet or exceed IBISWorld E3011 (Construction — Non-Residential Building) industry benchmarks.

Why It Matters

Translating financial strength into client outcomes

Market Pressure	Our Response	Client Outcome
4–6% cost escalation	\$185M cash on hand	Immediate mobilisation
Fitout lead times extending	28.6% gearing	Bonding headroom
~3,000 industry insolvencies	\$350M retained earnings	No short-term debt risk
Live hospital environment	6.9x interest coverage	Programme continuity

Proven delivery Fiona Stanley \$1.6B · Perth Children's \$1.2B · SJOG Midland \$360M

Design Management Plan


Presented by Joe

03 SECTION THREE

Design coordination, BIM workflow, quality, long-lead procurement and constructability planning for the SJOG Midland expansion.

Program Milestones

Design through to construction release — Jan 2026 to Sep 2026

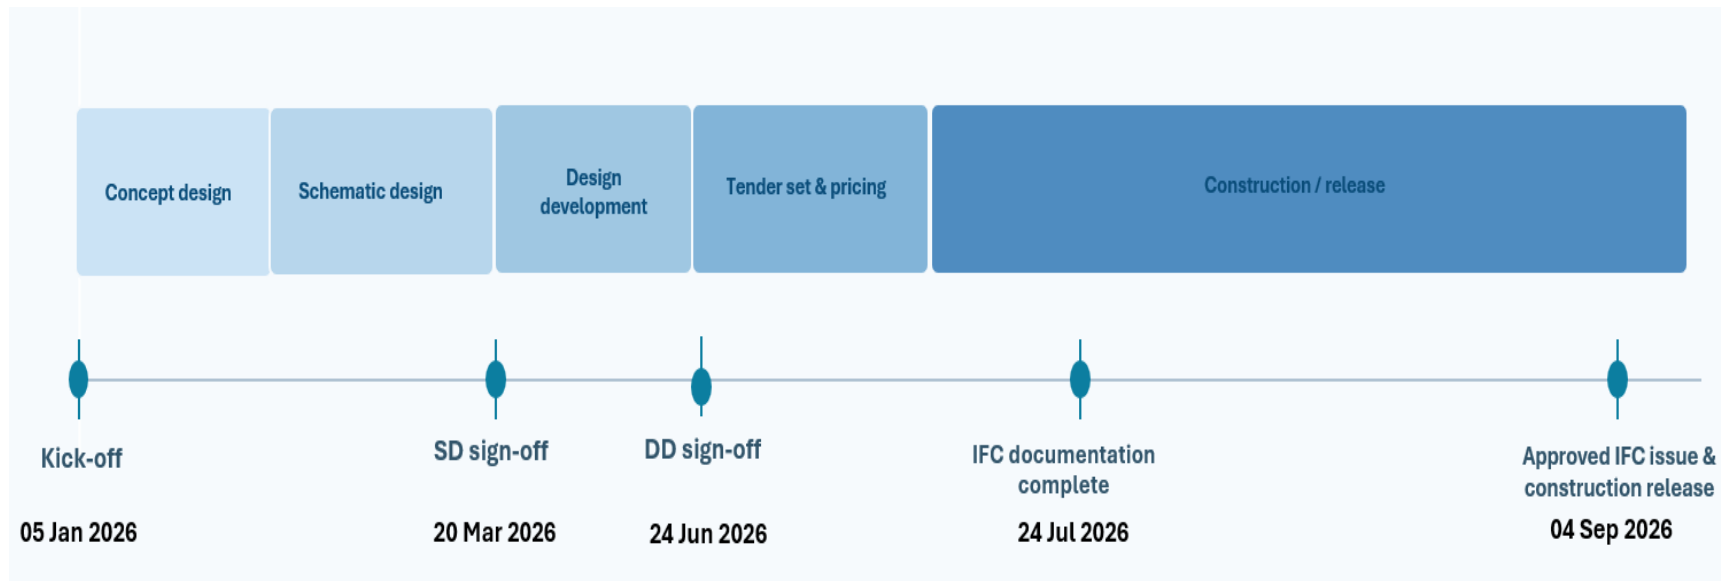

Modular Design / Prefabricated Health Rooms or Pods

Repeatable offsite-built clinical spaces to improve programme certainty, quality control and site efficiency.

Offsite-to-site modular workflow

1

Offsite fabrication

2

Quality checks


3

Delivery to site


4

Rapid install & connection

Repeatable rooms become standardised modules that can be procured, built and commissioned with greater consistency.

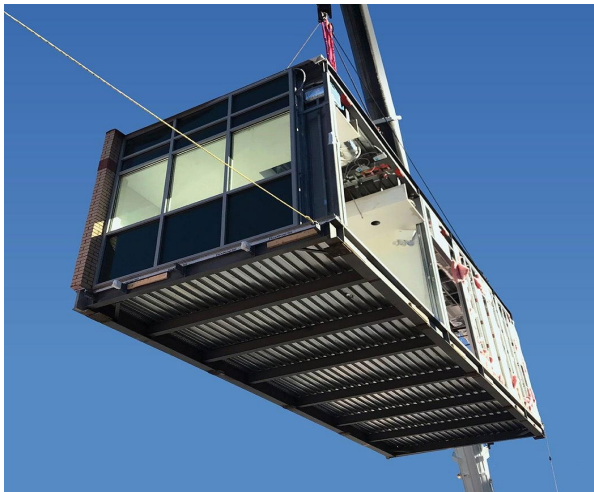

BIM Coordination in Hospital Design

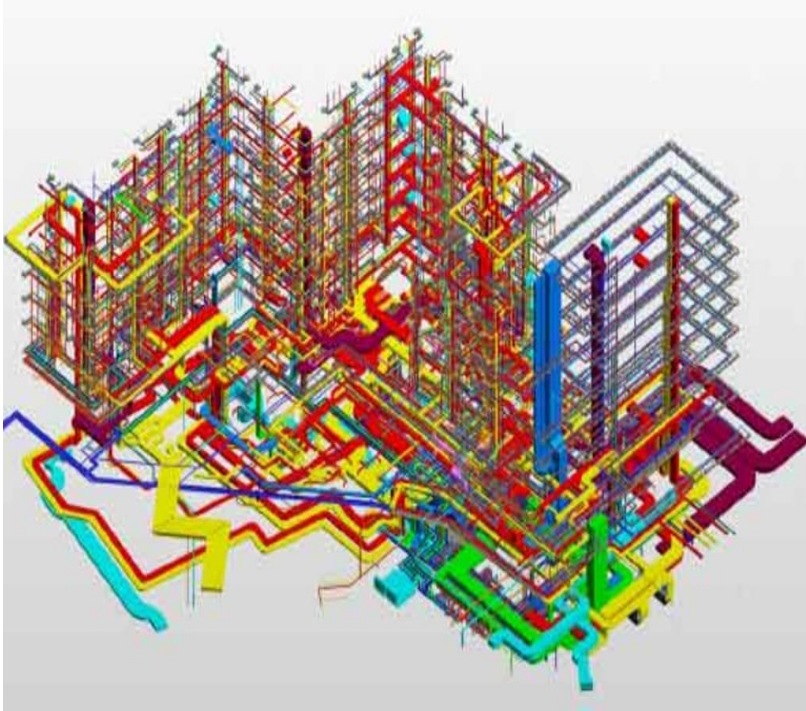

1

Model Integration

Architectural, structural and services models combined into one coordinated environment.

2

Clash Detection

Software identifies hard clashes, ceiling-space conflicts and service overlaps.

3

Design Resolution

Consultants and trades resolve clashes before procurement and site installation.

4

Install Readiness

Coordinated drawings reduce rework, RFIs and programme delays during construction.

Quality & Compliance in Design

1

NCC + Australian Standards

Ensure design meets building code, structural, fire, accessibility and service performance requirements.

2

Fire Safety + Accessibility

Plan egress, fire systems, compartmentation, access paths and inclusive facilities into the layout.

3

Health Facility + LARU

Support infection control, clinical workflows, operational safety and Licensing and Accreditation Regulatory Unit requirements.

Early Procurement — Long Lead Items

LONG LEAD ITEM	RISK / DESIGN COORDINATION REQUIREMENT
Structural & Lightweight Steel	Requires detailing, consultant review, formal approval and manufacturing.
Mechanical Units	Requires shop drawings completed with consultant review and formal approval.
Electrical Switchboards	Requires shop drawings and consultant review prior to manufacture.
Aluminium & Glazing	Requires shop drawings completed with consultant review and formal approval.
Tilt Panels	Shop drawings may be delayed due to RFI / structural review requirements.
Architectural Façade Brickwork	Custom brickwork can have long delivery times — suppliers typically hold residential stock.
Lift	Requires shop drawings completed with consultant review and formal approval.
Medical Gas, RO & Potable Cold-Water Plant	Critical hospital services on Level 2 GA that must be coordinated with commissioning.
Operating Theatre, Cath Lab & Specialist Equipment	Long lead due to coordinated room layouts, service interfaces and commissioning.



05

Constructability Analysis

St John of God Midland Private Hospital

17,233

m² GFA

96

Overnight Beds

9


Operating Theatres

5

Storeys

Construction Milestones

On-site programme — December 2026 to December 2028

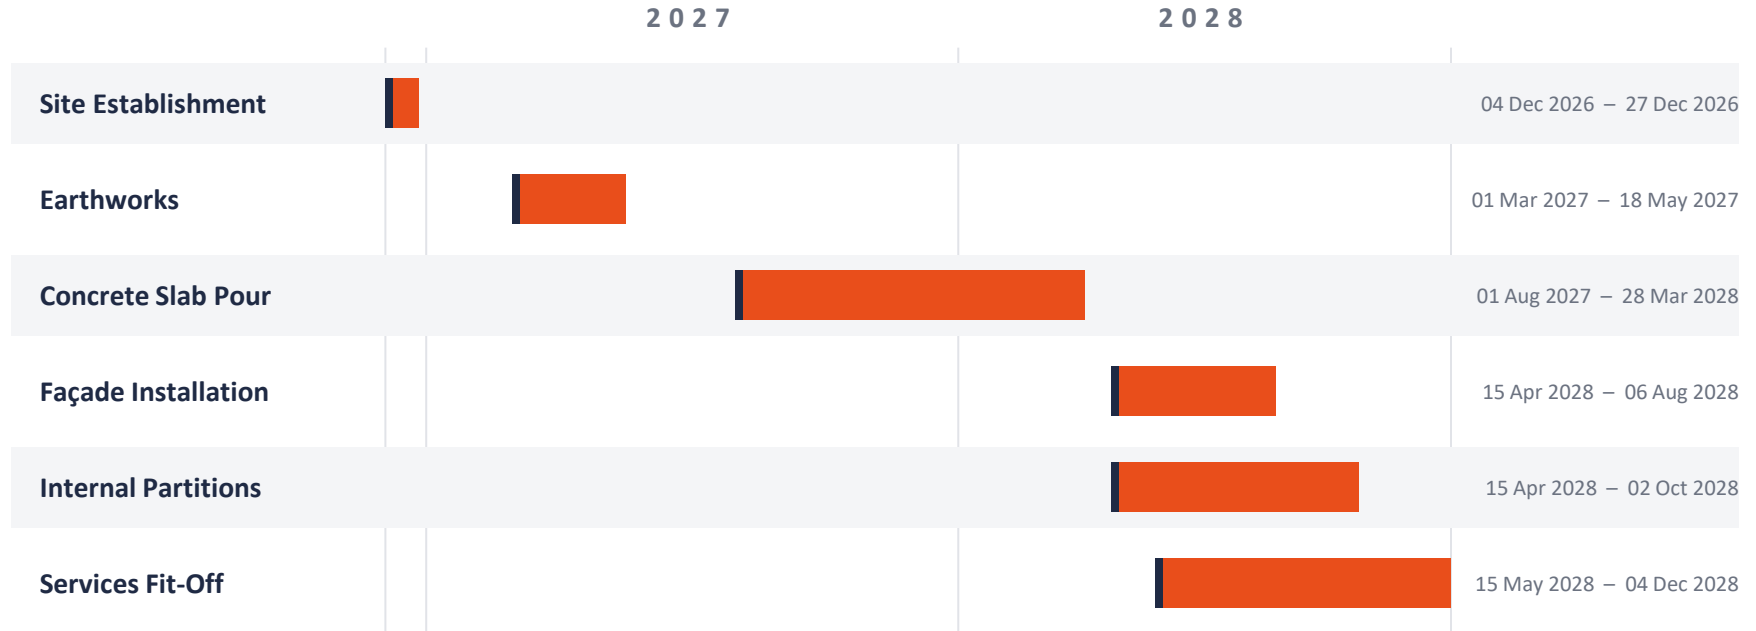


Critical path: Concrete slab → façade → internal partitions → services fit-off, with façade and partitions running concurrently from April 2028.

Methodology & Site Logistics

Site Logistics Plan — St John of God Midland Private Hospital

Site Logistics Plan

St John of God Midland Private Hospital

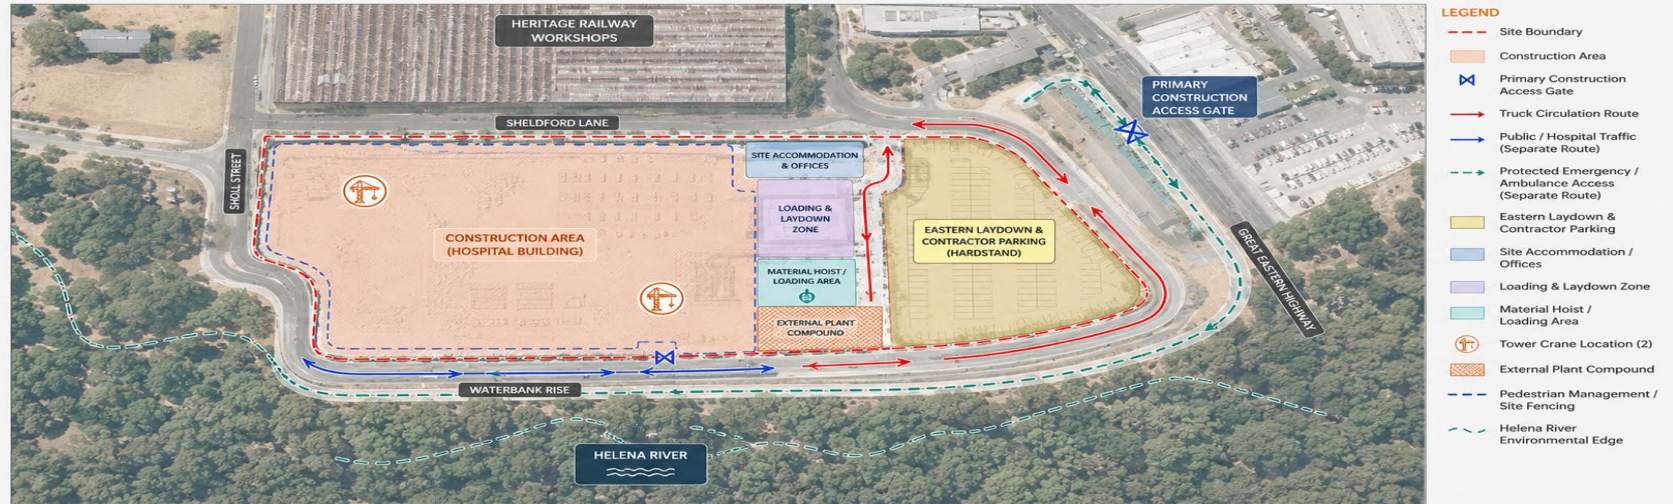

SK001
Site Logistics Plan



PROJECT
St John of God Midland Private Hospital
107 St John of God Drive, Midland WA

DATE
May 2025

SCALE
NTS



NOTES
All routes are indicative and subject to change in accordance with approved Traffic Management Plan. Maintain clear access at all times.




Safety, Access & High-Risk Works

Site Safety Plan — St John of God Midland Private Hospital

Site Safety Plan

St John of God Midland Private Hospital

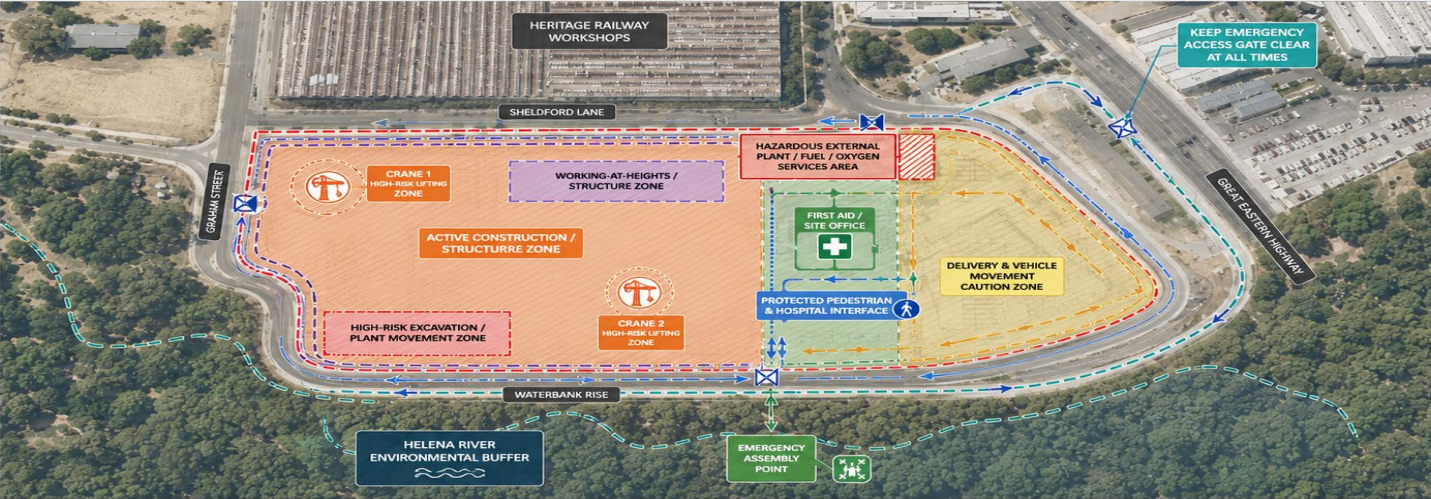

- LEGEND**
- Site Boundary
 - Active Construction / Structure Zone
 - High-Risk Crane & Lifting Zone (2)
 - High-Risk Excavation / Plant Movement Zone
 - Hazardous External Plant / Fuel / Oxygen Services Area
 - Working-at-Heights / Structure Zone
 - Delivery & Vehicle Movement Caution Zone
 - Restricted Public Interface / Exclusion Boundary
 - Protected Pedestrian & Hospital Interface
 - Protected Emergency / Ambulance Route (Keep Clear)
 - Emergency Assembly Point
 - First Aid / Site Office
 - Site Fencing / Controlled Access Point

SK002
Site Safety Plan



PROJECT
St John of God Midland Private Hospital
107 St John of God Drive, Midland WA

DATE
May 2025

SCALE
NTS



NOTES
All routes are indicative and subject to change in accordance with approved Traffic Management Plan.
Maintain exclusion zones at all times.



Environment & Sustainability

Environmental constraints and design responses

Environmental Constraints & Solutions

- Helena River Buffer
- Heritage & Contamination
- External Plant Controls

Digital Coordination

- BIM & Clash Detection
- Prototypes & Mock-ups

Materials & Airtightness

- Compliant Specification
- Airtightness & IEQ
- Commissioning Plan



Quality, ITPs & Site Controls

Verify → Inspect → Test → Document

01

VERIFY

Before Manufacture

Shop drawing approval before manufacture. Site dimension verification and discrepancy reporting.

02

INSPECT

Before Concealment

ITPs for clinical areas, fire-stopping and roof. Hold points before ceiling and wall closure.

03

TEST

Before Completion

System commissioning and plinth verification. Roof drainage and waterproofing tested operationally.

04

DOCUMENT

Before Handover

Fire certs, O&M manuals, WHS compliance docs. Commissioning records before practical completion.

Key Message

Constructability on this project is governed by...

Methodology

Zone-based, package-led delivery — structure, facade, risers, fitout, commissioning.

Safety

Access control, clinical workface coordination and high-risk work planning.

Sustainability

Digital coordination, prototypes and compliant materials reduce waste and rework.

Quality

Verify before manufacture, inspect before concealment, test before completion.

Cost Plan Summary

St John of God Midland Private Hospital expansion — elemental cost summary

Building Cost (BC)	\$167,415,261
Preliminaries (11%)	\$18,415,679
Contingency (5%)	\$8,370,763
Escalation (4%)	\$7,768,068
TOTAL PROJECT COST	\$201,969,771

Rate: $\approx$ \$11,700 / m²

Key Assumptions

Rates	Based on Rawlinsons + hospital benchmarks
Services Cost	High due to theatres, ICU, SSD
Preliminaries	11% (complex healthcare project)
Contingency	5%
Escalation	4%